

Note:

- During the attendance check a sticker containing a unique code will be put on this exam.
- This code contains a unique number that associates this exam with your registration number.
- This number is printed both next to the code and to the signature field in the attendance check list.

Advanced Computer Networking

Exam: IN2097 / Endterm **Date:** Wednesday 12th February, 2025
Examiner: Prof. Dr.-Ing. Georg Carle **Time:** 16:00 – 17:15

Working instructions

- This exam consists of **16 pages** with a total of **6 problems**.
Please make sure now that you received a complete copy of the exam.
- The total amount of achievable credits in this exam is 75 credits.
- Detaching pages from the exam is prohibited.
- Allowed resources:
 - the provided cheat sheet
 - one **analog dictionary** English ↔ native language
- Subproblems marked by * can be solved without results of previous subproblems.
- **Answers are only accepted if the solution approach is documented.** Give a reason for each answer unless explicitly stated otherwise in the respective subproblem.
- If you used a second template in the back of the exam, mark this in the original template using the provided check box.
- Do not write with red or green colors nor use pencils.
- Physically turn off all electronic devices, put them into your bag and close the bag.
- The multiple choice questions need to be filled out as follows:

Mark correct answers with a cross



To undo a cross, completely fill out the answer option



To re-mark an option, use a human-readable marking



Left room from _____ to _____ / Early submission at _____

Problem 1 Quiz (14 credits)

The following questions cover multiple topics and can be solved independently of each other.

For each multiple choice question, exactly one answer is correct.

Multiple Choice

a)* Which of the following terms is **no** IPv4 to IPv6 transition mechanism?

- Dual Stack 6transition DS Lite 6to4

b)* Which of the following options can be used to **reasonably** perform large-scale IPv6 Internet scans?

- Hitmans Hitlists Broadcasts
 Full address enumeration Multiplicative group

c)* Which of the following options is the definition of **reproducibility** according to ACM?

- Same* team executes experiment using *different* setup
 Different team executes experiment using *same* setup
 Different team executes experiment using *different* setup
 Same team executes experiment using *same* setup

d)* In which of the following DNS message sections can the OPT record be found?

- Answer Question Authority Additional

e)* How long is the RDATA of an AAAA record in bit?

- 136 128 40 32

f)* What kind of load balancing is **definitely** used for dell.com given the following dig output?

```
endterm@acn.net.in.tum.de:~$ dig +short dell.com
143.166.136.12
143.166.30.172
```

- QUIC-based load balancing DNS-based load balancing
 Anycast-based load balancing HTTPS-based load balancing
 No load balancing TCP-based load balancing

g)* How does QUIC prevent head-of-line blocking?

- By making the transport layer stream-aware
 By retransmitting only lost stream frames instead of whole packets
 By using multiple QUIC connections for each stream
 By separating stream data into multiple packets



h)* Features of which layers of the ISO-OSI model are integrated in the QUIC protocol?

- Layers 2, 3, and 4 Layers 4, 5, and 7 Layers 3, 4, and 5 Layers 1, 2, and 3

Mixed Problems


The PC wants to communicate with the server using 6to4.

i)* Draw the path of a single request and response between the PC and the server. Use dashed lines for IPv4 traffic and solid lines for IPv6 traffic.

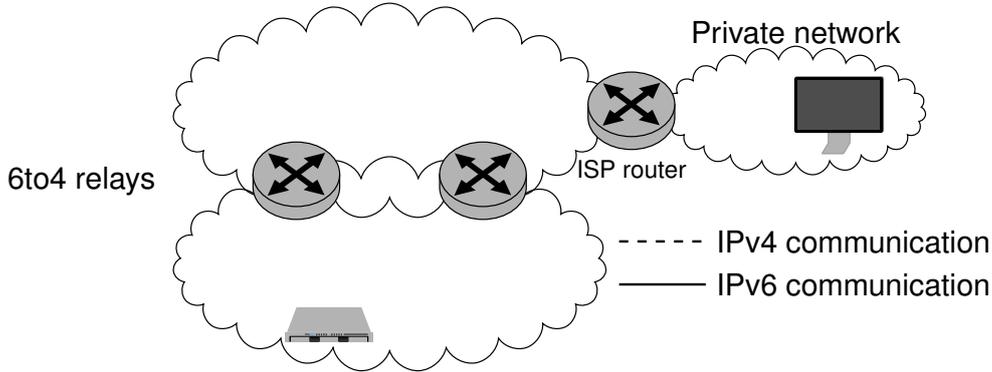

Grade the second template in the back

j)* The protocols telnet and SSH should be blocked using a P4 switch via their well-known port numbers. How can both protocols be blocked using a single match?




k)* Name the decisive difference used to recognize if a DNS message is a query or a response.



l)* Explain what QNAME minimization is and name an advantage and one disadvantage of using it.

Explanation:



Advantage

Disadvantage

Problem 2 Wireshark (17 credits)

Consider the network topology in Figure 2.2. The hexdump of the frame visualized in Figure 2.2, which arrived at router R2, is printed in Figure 2.1. No host in the network uses layer 4 options. The frame in Figure 2.1 contains an IPv6 fragmentation extension header, and the M flag is set to 0. Thus, the frame contains the last fragment of a fragmented IPv6 packet.

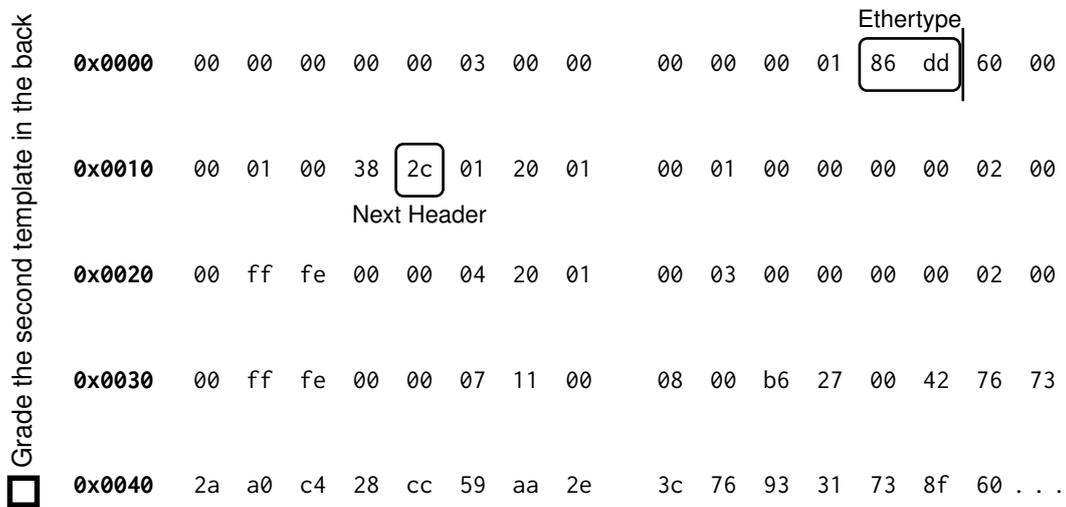


Figure 2.1: Partial hexdump of a frame arriving at router R2 without FCS

0	1	0	1	0	1	2	0	1	2	3	4	5	6
0	1	0	1	0	1	2	0	1	2	3	4	5	6

a)* Separate all visible headers in Figure 2.1 with a vertical line like the given example.

b)* What is the source MAC address of the frame? Mark it in Figure 2.1.

c)* Mark the destination IPv6 address in Figure 2.1 and give it in shorthand, default notation.

d) How long is the **Layer 4 SDU** of the **reassembled** IP packet? Explain your steps in detail using the following table. Mark all header fields you used in Figure 2.1.

Hint: The IPv6 payload length includes extension headers.

Notes:	
--------	--

(+/-) Size	Explanation
Σ	

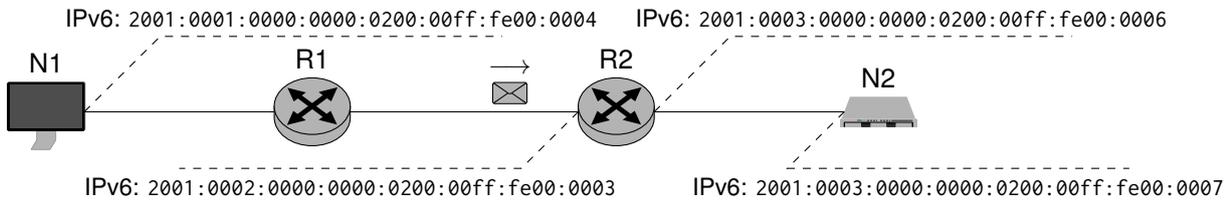


Figure 2.2: Network topology and position of the frame in Figure 2.1

We now consider the **response frame** Ψ being sent out as response to the arrival of the frame in Figure 2.1. Before the frame in Figure 2.1 arrived at router R2, all caches are filled.

e)* Frame Ψ contains an ICMPv6 time exceeded header. Explain why this is the case and what happens. Mark header fields needed for your explanation.

	0
	1
	2

f) Fill out the following header templates starting with the Ethernet header for frame Ψ .

1. Write IP and MAC addresses in their standard format, numbers either in hexadecimal (e.g., 0xf2) or decimal (e.g., 242) notation.
2. Choose appropriate values for fields which are not fixed.

	0
	1
	2
	3
	4
	5

First header: Ethernet

	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
0B	<div style="border: 1px solid black; padding: 5px;"> <p style="text-align: center;">Ethertype: 0x86dd</p> <p style="text-align: center;">IPv6 header</p> </div>																															
4B																																
8B																																
12B																																

Second header: IPv6

	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
0B	Version: 6 ₍₁₀₎				Traffic Class: 0 ₍₁₀₎								Flow Label: 0x00001																			
4B																																
8B																																
12B																																
16B																																
20B																																
24B																																
28B																																
32B																																
36B																																

ICMPv6 Time Exceeded Header

Third header: ICMPv6 Time Exceeded

	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
0B																	Checksum															
4B	unused: 0 ₍₁₀₎																															


IPv6 Header of the original frame + the full layer 3 payload

Problem 3 Routing Table Data Structures: Trie-based Lookup (15 credits)



Consider the routing table and Next-Hop ID table given in Table 3.1.

Table 3.1: Routing table and corresponding next-hop ID table


(a) Routing table					(b) Next-hop ID table for the tries		
Nº	Prefix	Prefix ₂	Next-Hop	Iface	NH-ID	Next-Hop	Iface
①	32.0.0.0/3	0010...	172.18.1.1	eno7	A	192.168.2.1	eno7
②	160.0.0.0/3	1010...	33.0.2.1	eno1	B	33.0.2.1	eno1
③	64.0.0.0/2	0100...	192.168.3.1	eno7	C	192.168.3.1	eno7
④	192.0.0.0/2	1100...	10.0.0.1	eno1	D	172.18.1.1	eno7
⑤	128.0.0.0/1	1000...	33.0.2.1	eno1	E	10.0.0.1	eno1
⑥	0.0.0.0/0	0000...	192.168.2.1	eno7	X	empty node	



a)* Build a basic trie representing the routing table in Table 3.1a. X marks empty nodes.

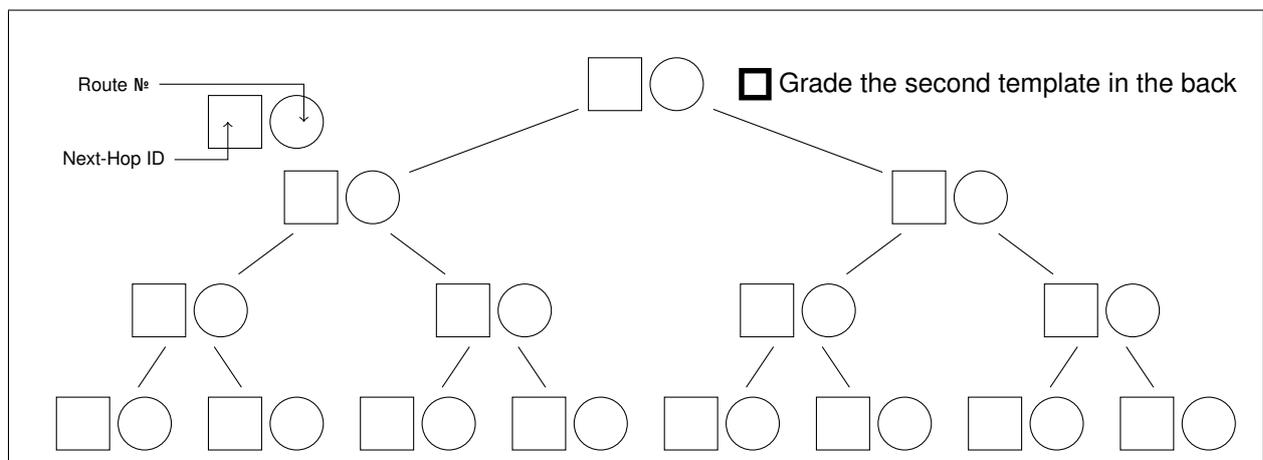

b)* Perform a look up for 188.273.281.97 in the following trie. Circle the final leaf in the trie and explain your decision. Remark: The letters represent Next-Hop IDs. X marks empty nodes.

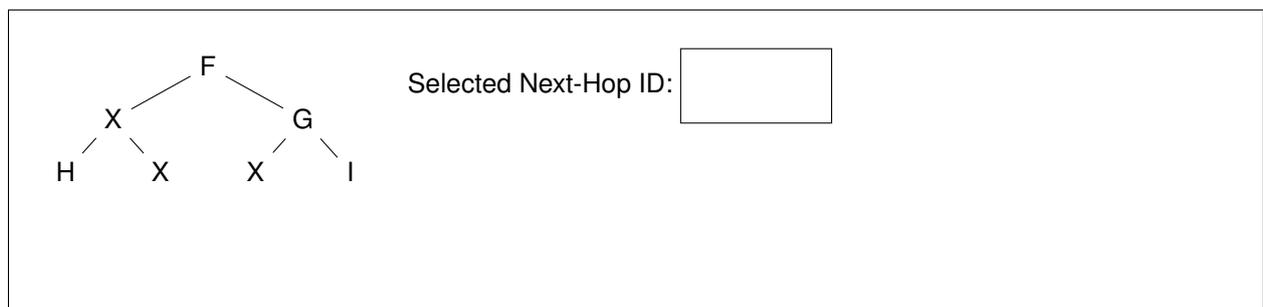


c)* Briefly explain a problem of basic tries used as a routing table data structure.




d) Name an alternative trie-based data structure that solves this problem.

e) Explain briefly what differentiates your alternative data structure from a basic trie.




The size of a data structure and the number of accesses to the data structure impact the performance of lookups. Routing table data structures often optimize for one of both parameters.

f)* How many accesses need to be performed on trie-based lookup structures for IPv4 routing tables in the worst case?



g) For which parameter (data structure size or memory accesses) are the basic trie lookups and DIR-24-8 optimized? Explain your reasoning in the box below.

DIR-24-8 optimizes for memory accesses data structure size.
Basic trie lookups optimize for memory accesses data structure size.



Problem 4 Network Analysis (9.5 credits)

Consider the network topology depicted in Figure 4.1, where two hosts H1 and H2 want to communicate with each other. Host H1 accesses the network of H2 via an SDN-enabled switch and two routers R1 and R2. Host H2 is directly attached to the routers R1 and R2.

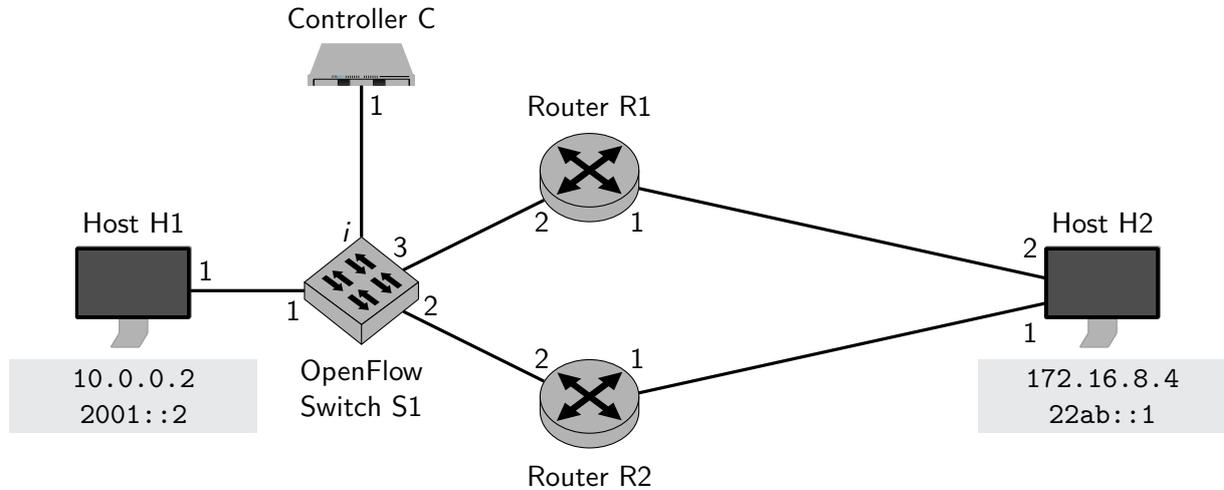


Figure 4.1: Network topology


The OpenFlow switch has a configuration interface named *i*, reachable at 192.168.0.2. Furthermore, the switch has three output ports named 1 to 3. Listing 1 gives the commands, which configured this switch.

Listing 1: Open vSwitch table entries

```
1 ovs-ofctl add-flow tcp:192.168.0.2 dl_type=0x86dd,nw_dst=22ab::1,priority=10000,actions=output:3
2 ovs-ofctl add-flow tcp:192.168.0.2 dl_type=0x0800,nw_dst=172.16.8.4,priority=10000,actions=output:2
3 ovs-ofctl add-flow tcp:192.168.0.2 priority=0,actions=controller
```


0  a)* What is the general effect of specifying a *dl_type* in an OpenFlow rule? Where is the *dl_type* specified in Ethernet?

1

0  b) Look at Lines 1 and 2 of the commands shown in Listing 1. What is the effect of the different values for *dl_type*.

1

c) Look at Line 1 of the commands shown in Listing 1. Explain (1) what this command does and describe (2) what the arguments `tcp:192.168.0.2`, `d1_type`, `nw_dst` and `actions` do in this example.




d) The IP address of Interface 2 of Router R2 is not given in Figure 4.1. Give a sensible example for an IP address for that interface.



For security reasons, Controller C is configured to drop ICMP packets.

e) All participating hosts and routers already know the MAC addresses of each other. Host H1 pings 172.16.8.4. Despite ping packets arriving at H2, the response packets are not received by H1. Describe the way of the ping packets from Host H1 to H2 and back. Base your explanation on the interfaces (e.g., H1.1) given in Figure 4.1 and the rules specified in Listing 1.



f) What rule(s) has/have to be installed on Switch S1 to receive the replies at Host H1.



Problem 5 Transport Layer Mechanisms (11.5 credits)

Transport protocols like QUIC or TCP offer various features, e.g., reliability.

0

 1 a)* How do these protocols detect lost packets? Name and briefly explain two mechanisms that are usually used to detect loss and trigger retransmissions.

2

①

②

An accurate RTT estimation is crucial for one of the previously mentioned mechanisms.

0

 1 b) Shortly describe what happens if the RTT is overestimated or underestimated.

2

RTT overestimated:

RTT underestimated:

0

 1 c) Which mechanism is used in TCP to smooth the RTT estimation? What influences the current estimation?

1

Mechanism:

What influences the current estimation?

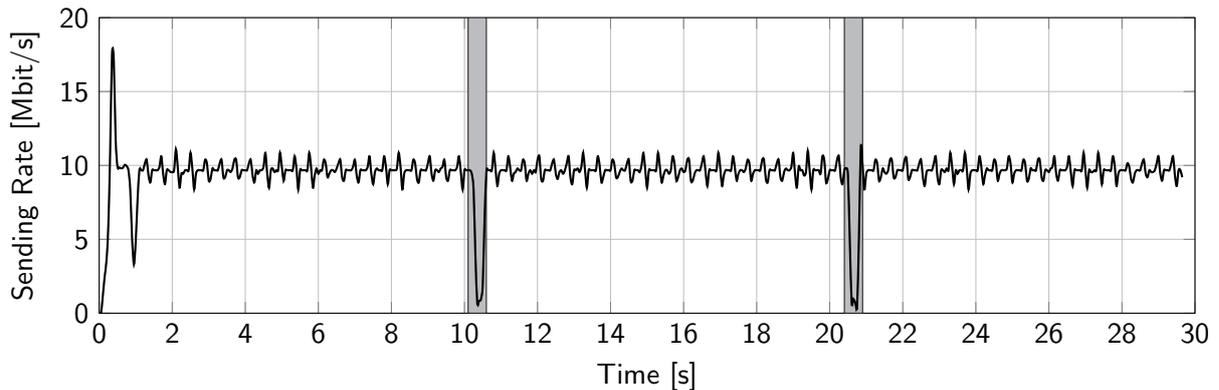


Figure 5.1: Sending rate over time for a TCP connection using the BBR algorithm.

Congestion control algorithms like Reno, CUBIC, and BBR try to prevent overloading the network with too many packets. The BBR algorithm defines four phases.

0

 1 d)* Name the phase marked in Figure 5.1 and briefly explain why the sending rate spikes downwards.

1

Name:

Explanation:

d) Assume the following changes to the scenario in Figure 6.1:

- The rate of Flow f_1 is set to $r = 7$
- The burst of Flow f_2 is set to $b = 10$



What is the end-to-end delay bound of f_1 ?


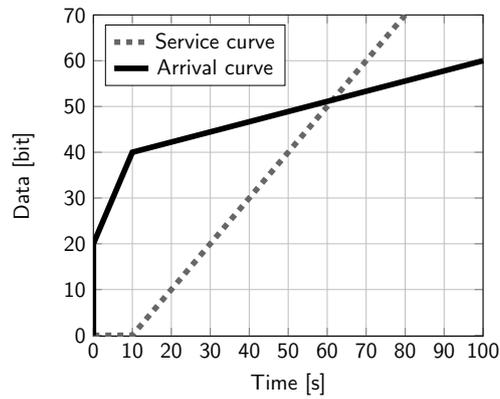


Figure 6.2: Arrival- and service curve

e)* Consider the two curves in Figure 6.2. What is the delay bound of a flow with this **non**-token-bucket arrival curve traversing a server with this rate-latency service curve?




Additional space for solutions—clearly mark the (sub)problem your answers are related to and strike out invalid solutions.

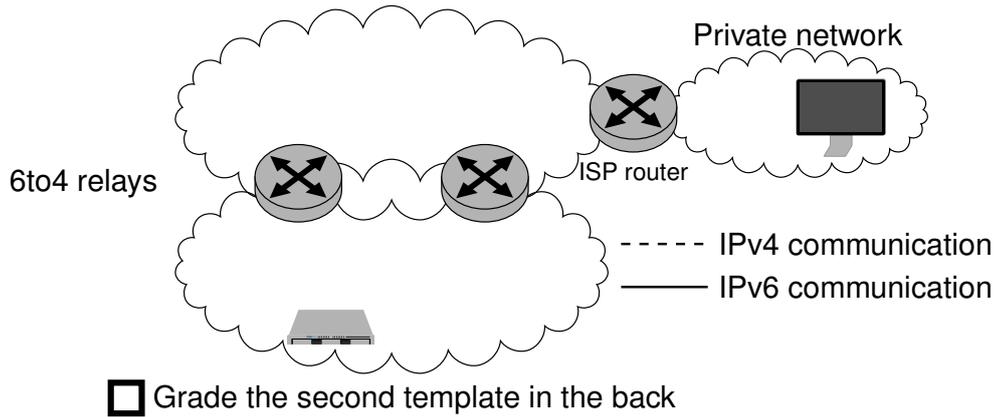


Grade the second template in the back

Grade the second template in the back


0x0000	00 00 00 00 00 03 00 00	00 00 00 01	86 dd	60 00
0x0010	00 01 00 38	2c	01 20 01	00 01 00 00 00 00 02 00
	Next Header			
0x0020	00 ff fe 00 00 04 20 01	00 03 00 00 00 00 02 00		
0x0030	00 ff fe 00 00 07 11 00	08 00 b6 27 00 42 76 73		
<input type="checkbox"/> 0x0040	2a a0 c4 28 cc 59 aa 2e	3c 76 93 31 73 8f 60 . . .		

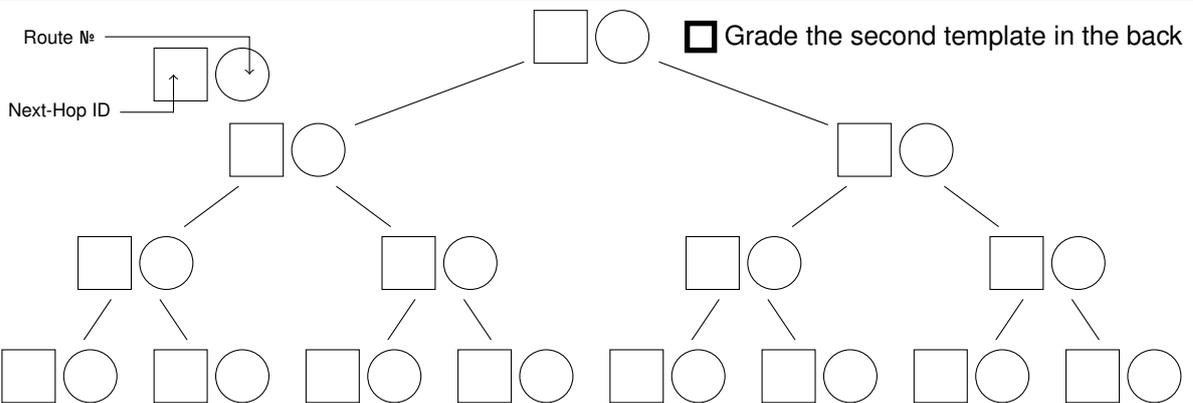

First header: Ethernet

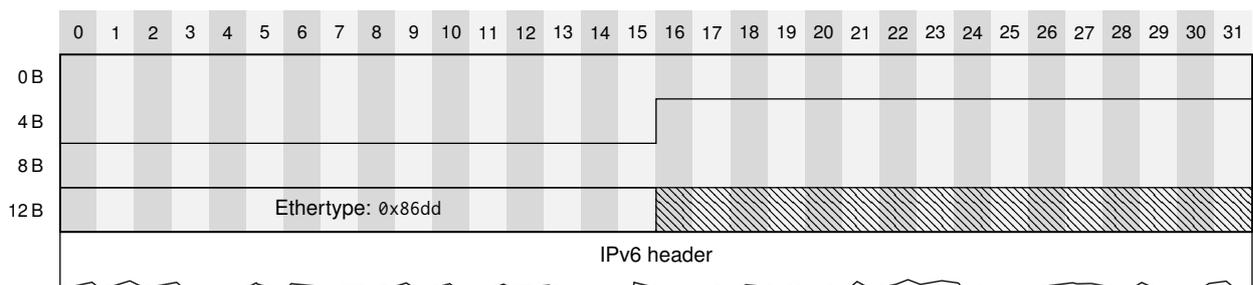

Second header: IPv6

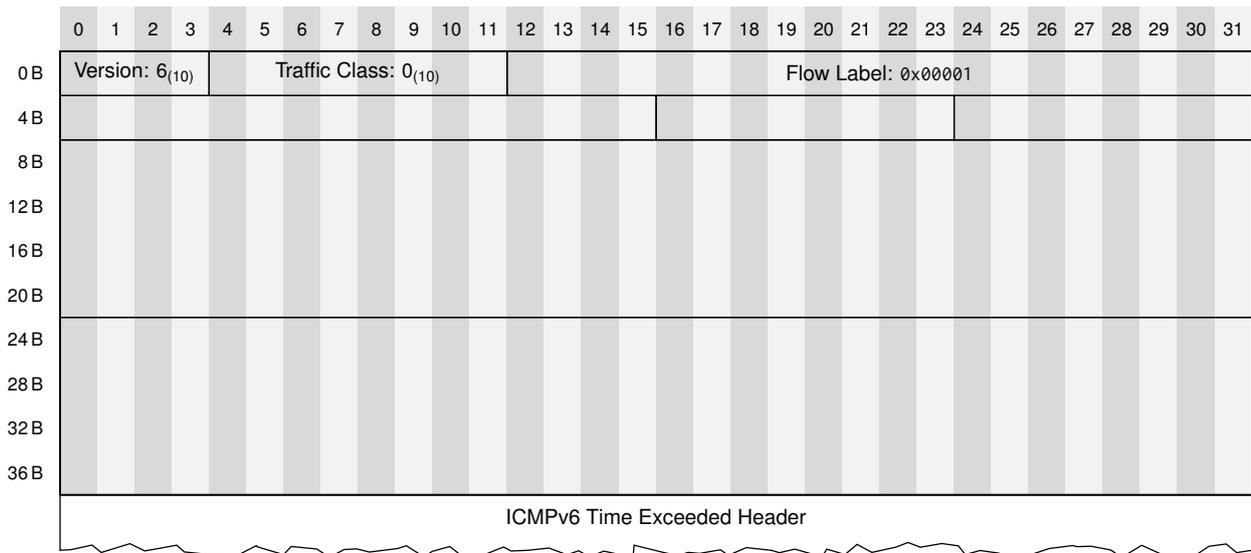

Third header: ICMPv6 Time Exceeded

